Food processor

HR2881/A

Service
Service
Service

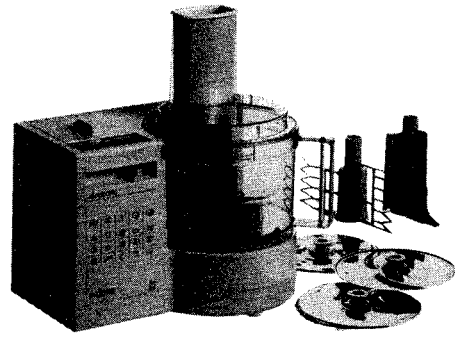

41 167 A12

Domestic Appliances and Personal Care Division

Service Manual

PRODUCT INFORMATION

No synthetic parts should be cleaned in a dish-washing machine.

Motor	: Series wound Statically and dynamically balanced. Self lubricating bearings
Power	: 400 W
Voltage	: 220/240 V, 50-60 Hz
Speeds unloaded	: 320 ⇄ 450 rpm. (item 31) 1600 ⇄ 2290 rpm. (item 27+30)
Cord length	: 1.4 m
Capacity	: bowl 800 cc liquid
Weight	: 4 kg
Dimensions	: 31×24×22 cm

The foodprocessor cannot be operated unless the bowl and lid are correctly in place.

SERVICE INFORMATION

Lubrication

Use graphite grease code no. 4822 390 20004 to grease the appliance on the following points:

1. Spaces between the teeth of the gearwheels
2. Shafts of the gearwheels
3. Pressure points of the springs.

Motor

The motor cannot operate properly when, owing to pollution, carbon brush (A) is unable to move freely in guide bush (B) and consequently cannot be pressed against the commutator.
For this reason guide bush (B) will be supplied with each carbon brush (A), code no. 4822 362 40118.

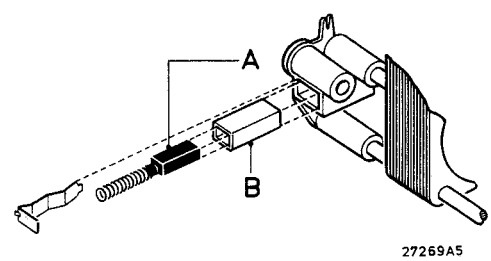

27269A5

To demount the cover plate (item 4) press in the 2 snap fingers, by the way of a pin, via the 2 gaps between the coverplate (item 4) and middle housing (item 9).
"Destroy coupling (item 27 at the lower side) if a gearwheel item 31 or 33 must be replaced."

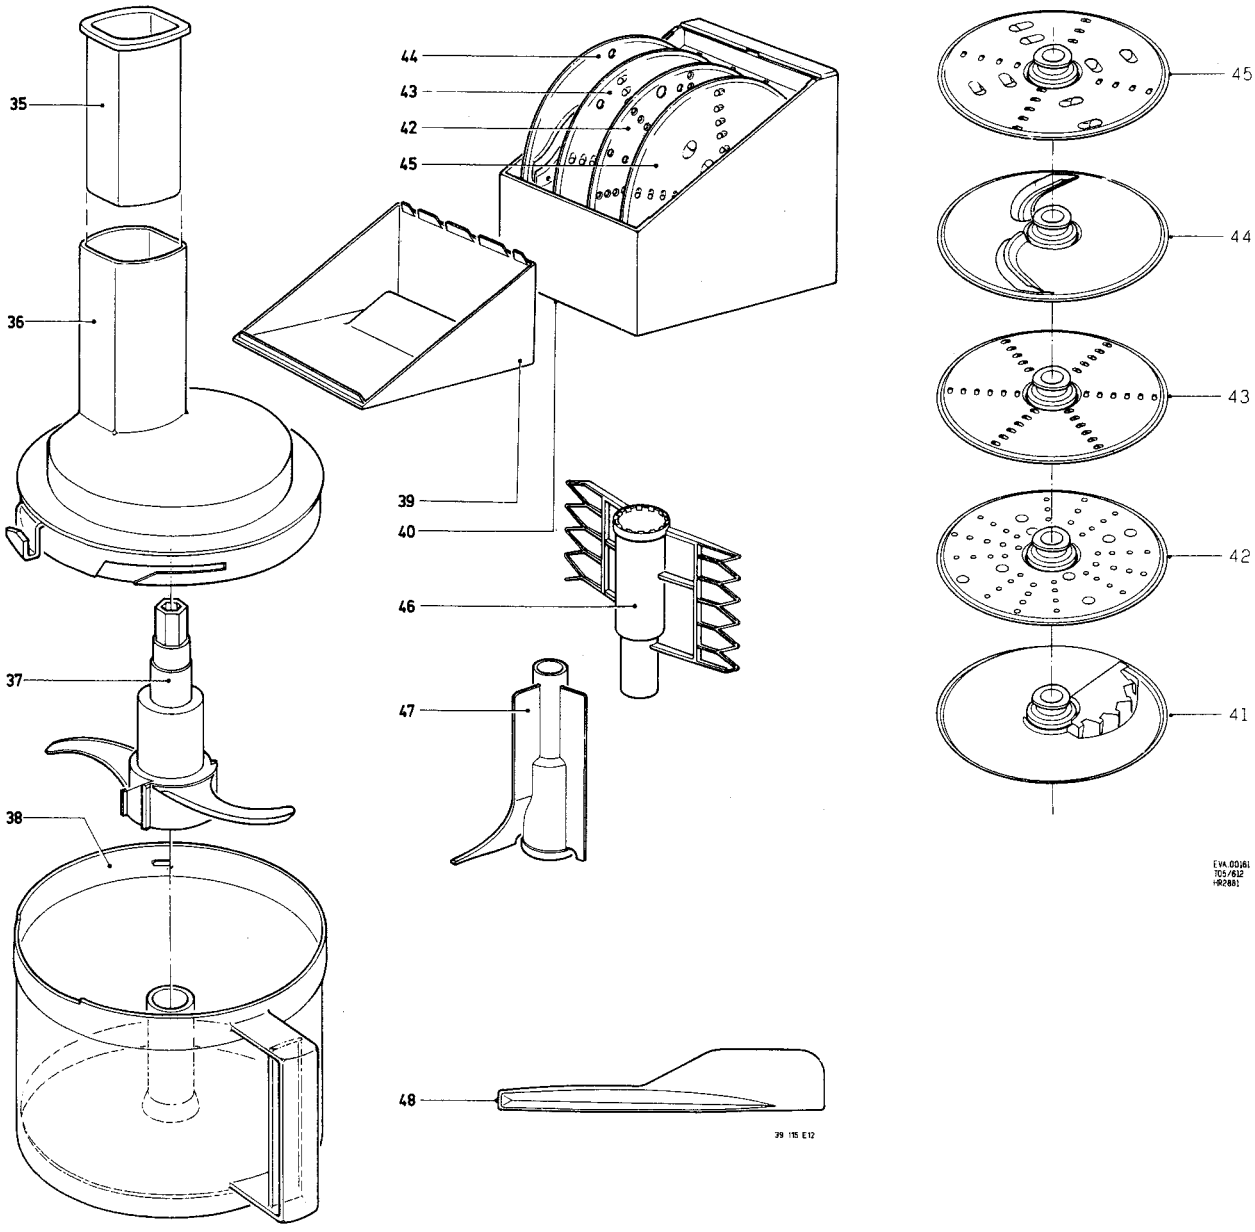

35	4822 690 40189	C1	5322 121 44302	1 = blue	
36	4822 441 10974 up to wk726	C2	4822 121 41156	2 = grey	
	4822 441 11059 from wk726 onwards	C3	4822 121 20217	4 = red	
37	4822 690 40192	D1	4822 130 31956	5 = green	
38	4822 418 40517 up to wk726	D2	4822 130 20039	6 = brown	
	4822 418 40567 from wk726 onwards	D3	4822 130 20081	7 = yellow	
39	4822 404 40614 HR2910	R1	4822 100 11084		
40	4822 600 10254 HR2910	R2	4822 105 10879		
41	4822 690 40184 HR2912	R3	4822 110 63152		
42	4822 690 40185 HR2911	R4	4822 110 63056		
43	4822 690 40183				
44	4822 690 40181				
45	4822 690 40182				
46	4822 690 40193				
47	4822 690 40194				
48	4822 690 40191				

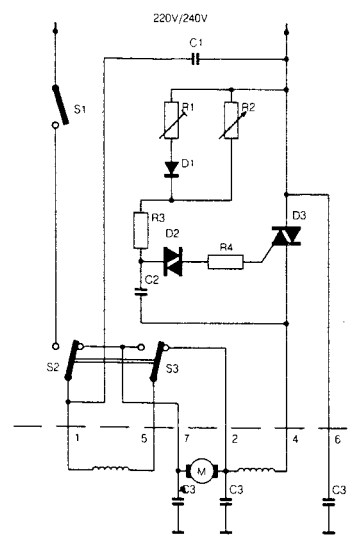

HR2881/A

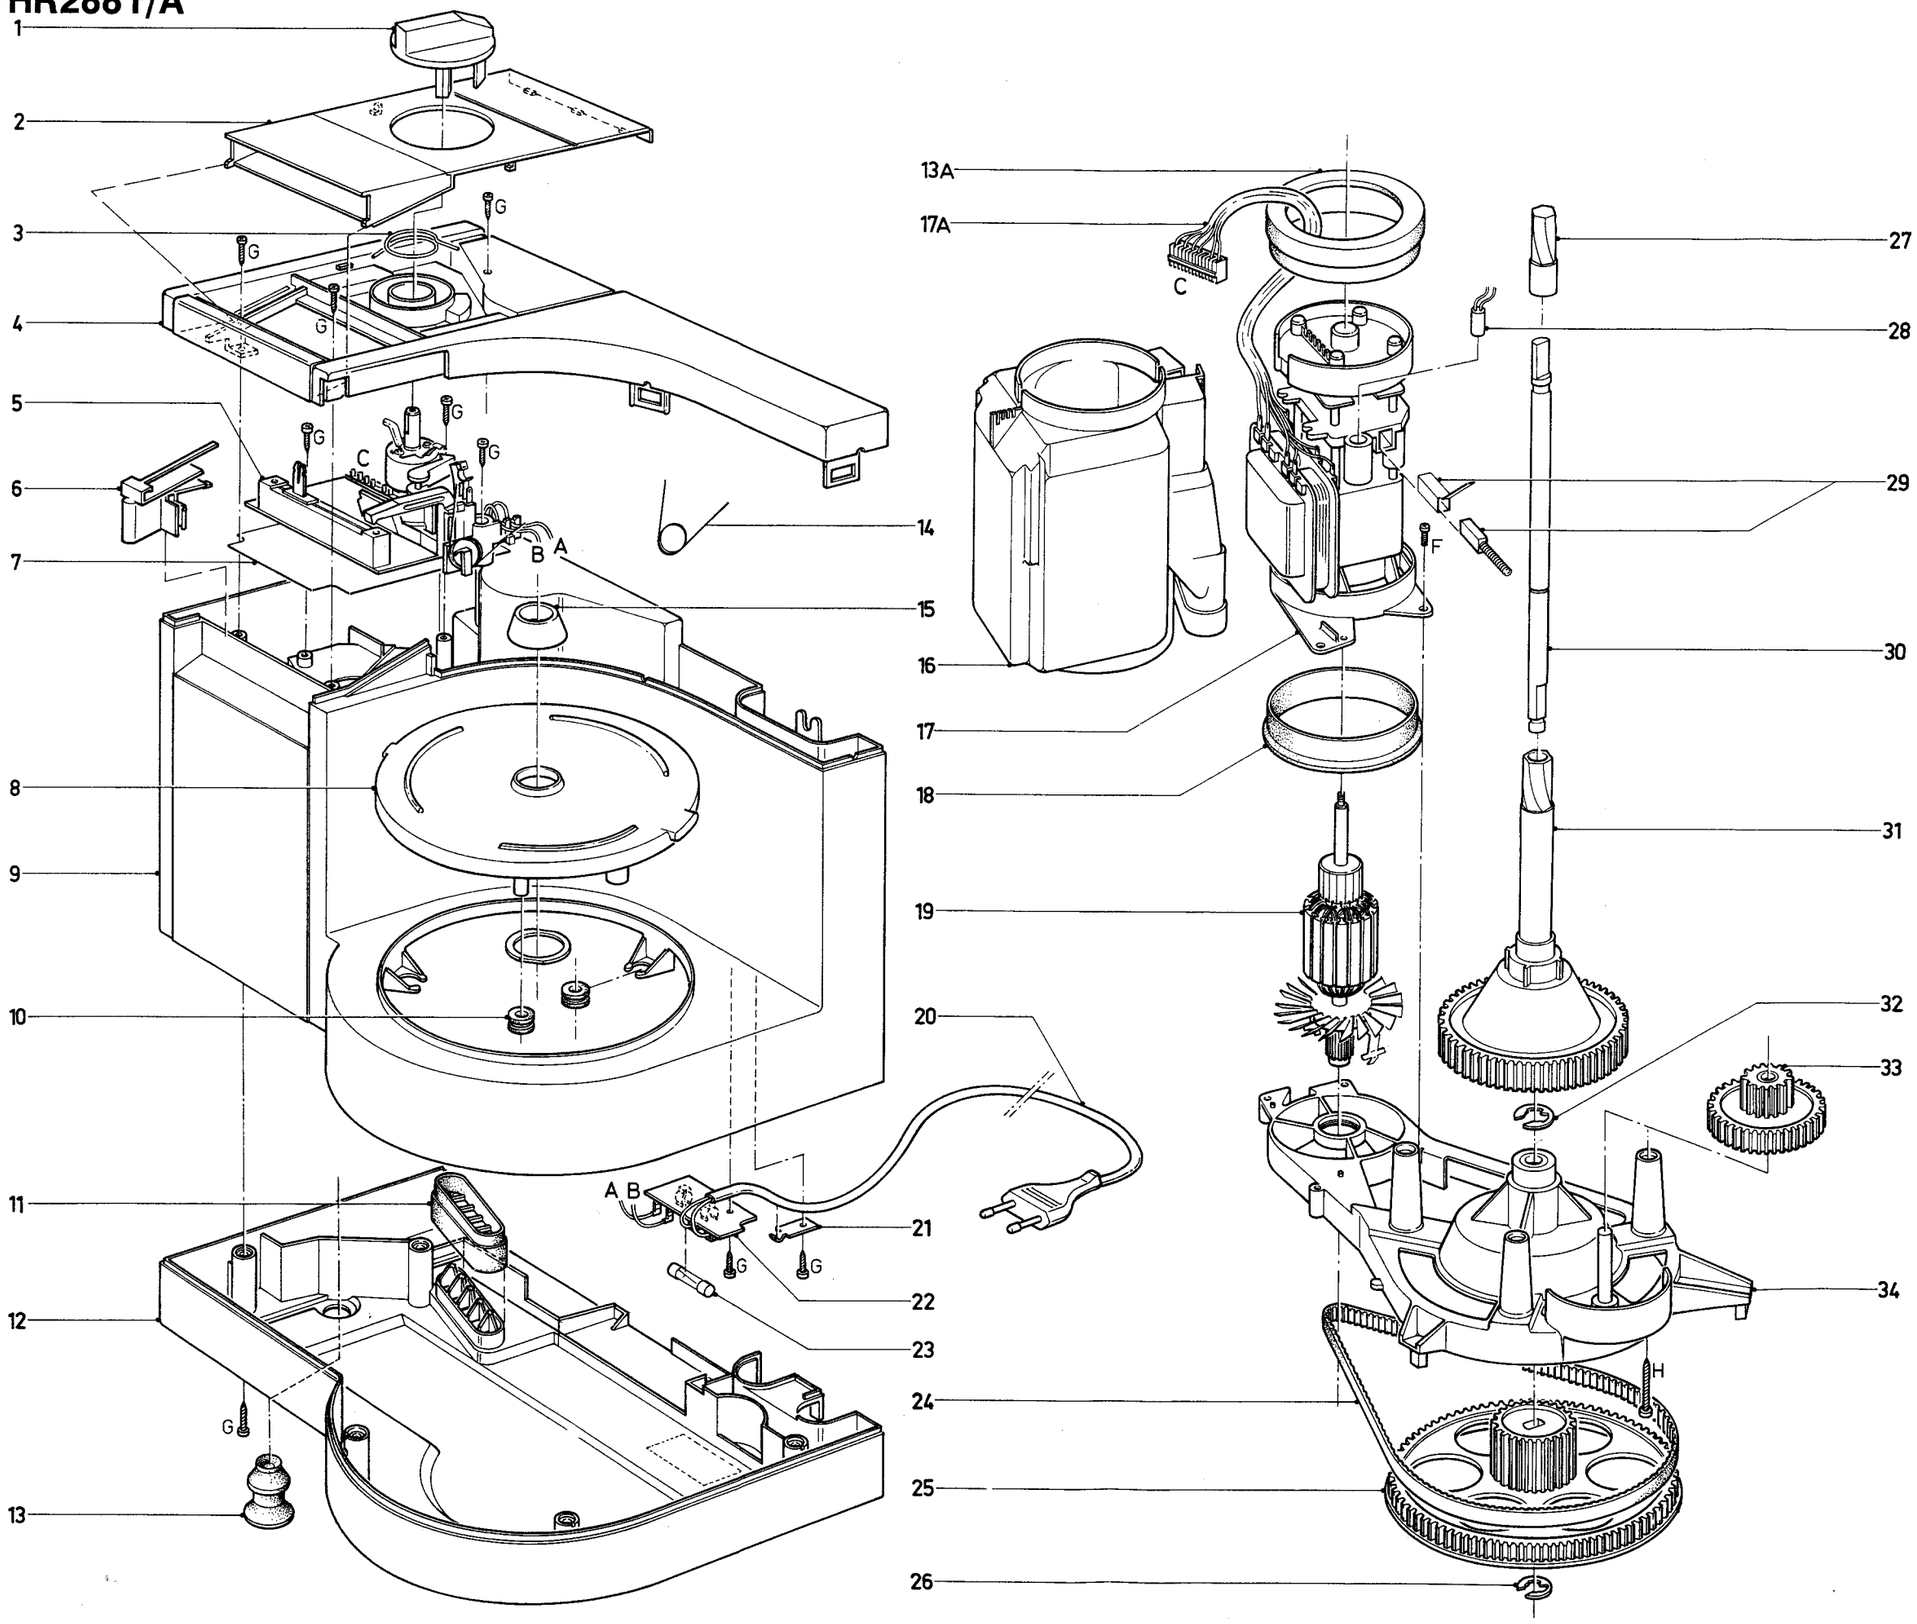

1		4822 413 51272
2		4822 441 30895
3		4822 492 42016
4		4822 441 30889
5		4822 277 10937
6		4822 410 25362
7		4822 459 80359
8		4822 441 30887
9		4822 441 30894
10		4822 532 60915
11		4822 532 60913
12		4822 441 30888
13		4822 462 41041
13A		4822 532 60914
14		4822 492 42017
15		4822 532 61033
16		4822 441 30668
17		4822 362 10259 (220 V)
		4822 362 10261 (240 V
17A		4822 320 50077
18		4822 532 60912
19		4822 362 20232 (220-240 V)
20		4822 321 10364
21		4822 401 10204
22		4822 277 10936
23		4822 253 30025
24		4822 358 30716
25		4822 528 60314
26		4822 530 70126
27		4822 441 30891
28		4822 157 51632
29		4822 362 40118
31		4822 528 81134
32		4822 530 70128
33		4822 528 81133
34		4822 464 30168
F		4822 502 11668
G		4822 502 30076
H		4822 502 30101

Grease 4822 390 20004

39 114 E12